



Pavers

PRODUCT RANGE & LAYING GUIDE

Outdoor paving for patios, paths, driveways & pool surrounds

Welcome to Brickora Pavers

Whether you are refreshing a small courtyard or laying an expansive driveway, the Brickora paving collection is designed to give your outdoor space a refined, personal finish. From crisp contemporary looks to warm, classic tones, our range offers plenty of inspiration to help bring your outdoor plans to life.

Available across a wide choice of sizes, formats, colours and finishes, Brickora pavers make the possibilities almost endless. Every colour in this brochure is named simply for its tone, so it is easy to picture the result and choose with confidence.

Contents

Laying & Specification Guide	3
Brickora Square	5
Brickora Square Speckle	6
Brickora Square Fleck	7
Brickora Grand Square	8
Brickora Plank	9
Brickora Plank Speckle	10
Brickora Plank Fleck	11
Brickora Classic Brick Paver	12
Brickora Heavy Duty Clay Paver	13
Bullnose Edging	14
Sealing & Accessories	15
Important Information	16

Laying & Specification Guide

Where you can use Brickora pavers

Paths & Stepping Stones

Suited to all pedestrian uses, in any laying pattern.

Patios & Alfresco Areas

Suited to all patio settings, in any laying pattern.

Driveways — Residential

For foot traffic, home driveways and light vehicle access.

Driveways — Light Commercial

For pedestrians and commercial vehicles when laid on a suitable base.

Steps & Pool Surrounds

Well suited to steps and the areas around pools.

Measuring your paving area

Begin by measuring the exact dimensions of the space you want to pave, using a tape measure and string line. Take each measurement more than once to be sure it is accurate, then sketch out your plan. The amount of material needed depends on the total area, worked out from your plan or from the area pegged out on site.

Rectangular areas

$\text{length (m)} \times \text{width (m)} = \text{area (m}^2\text{)}$

e.g. $3\text{m} \times 5\text{m} = 15\text{m}^2$

Triangular areas

$0.5 \times \text{base (m)} \times \text{height (m)} = \text{area (m}^2\text{)}$

e.g. $0.5 \times 3\text{m} \times 5\text{m} = 7.5\text{m}^2$

Odd-shaped areas

Split into sections, then add each area together

$\text{Area 1} + \text{Area 2} + \text{Area 3} = \text{total m}^2$

Brickora recommends calculating your square-metre area and adding around 5% for cuts and wastage — simply multiply the area to be paved by 1.05. From your estimate we can advise the number of packs or pallets required.

How to Lay Your Pavers

1. Prepare the site

Set your finished paving level so it sits below the damp-proof course of any building and slopes away from walls. Allow for the depth of the base, bedding sand and paver, then excavate and level the ground.

2. Base layer

For areas carrying vehicles, add a base course for extra strength. Use a well-graded granular material such as gravel or crushed rock, compacted between layers. Refer to AS 3727.1 for detail.

3. Bedding layer

Spread the bedding evenly over the compacted base. Use coarse, well-graded washed sand that is free of organic material.

4. Laying the pavers

Set out with string grid lines at even spacing around the job to keep your pattern true. Wet pavers before cutting to avoid slurry staining, and do not cut a paver to less than 25% of its size. For driveways, an interlocking herringbone pattern (45° or 90°) is strongest. Blend randomly from several packs as you lay for an even mix of tone.

5. Edge restraints

Restraints stop pavers shifting sideways and hold the sand and base in place. Run them around the full depth of the paved edge using concrete beam, kerbing or a similar method rated for the loads involved.

6. Control joints

With unrestrained edging and correctly gapped pavers, control joints are usually unnecessary. In large restrained areas, long driveways or with large-format units, add 10–15mm joints at stress points and spacings no greater than 6 metres, filled with a compressible material.

7. Joint filling & compacting

Sweep dry, fine washed sand across the surface so every joint is full. Compact with a plate compactor fitted with clean carpet to avoid scratching, top up the sand, then compact again and sweep off the excess.


8. Sealing

For the best appearance and easier upkeep, seal your pavers once laid and fully dry. Follow the sealer maker's advice. Never use hydrochloric acid on masonry pavers — it can cause permanent surface damage.

Brickora Square

Format 200 × 200 mm · 50 mm & 60 mm

A clean, versatile square paver that works beautifully across patios, paths and residential driveways. Its simple format suits almost any laying pattern, making it an easy, dependable choice for a crisp, modern finish.

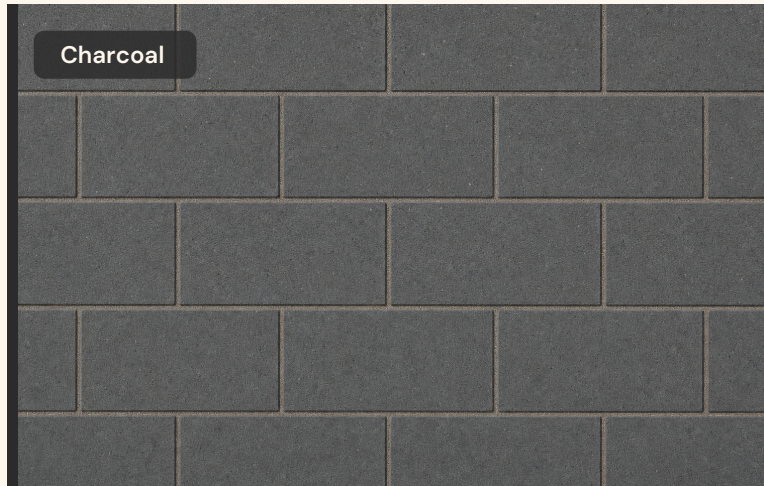

Specifications

Format

200 × 200 mm

Thickness options

50 mm & 60 mm

Pavers per m²

approx. 25


Supplied

In packs

Price on Application

Contact Brickora for current pricing

Colour range



Charcoal



Slate Grey



Sand



Ash



Silver

Silver is available in the 60 mm (200 × 200 × 60 mm) thickness only.

Brickora Square Speckle

Format 200 × 200 mm · 60 mm

The same trusted square format with a subtly speckled, granite–look finish. Fine flecks of tone add depth and character, giving outdoor areas a softer, more textured appearance.



Specifications

Format

200 × 200 mm

Thickness options

60 mm

Pavers per m²

approx. 25

Supplied

In packs

Price on Application

Contact Brickora for current pricing

Colour range



Snow



Stone



Mist



Storm

All pavers on this range are shown sealed. Sealing is recommended to protect appearance.

Brickora Square Fleck

Format 200 × 200 mm · 60 mm

A contemporary square paver with a fine terrazzo-style fleck through the surface. The scattered aggregate creates a refined, designer look that lifts modern courtyards and entertaining areas.



Specifications

Format

200 × 200 mm

Thickness options

60 mm

Pavers per m²

approx. 25


Supplied

In packs

Price on Application

Contact Brickora for current pricing

Colour range



Sky



Dew




Clay

For this fleck range we recommend a penetrating sealer only. All pavers shown sealed.

Brickora Grand Square

Format 300 × 300 mm · 40 mm & 60 mm

A larger square format that makes a bold, contemporary statement across patios and open outdoor spaces. Fewer joints and generous proportions give a smooth, expansive feel underfoot.

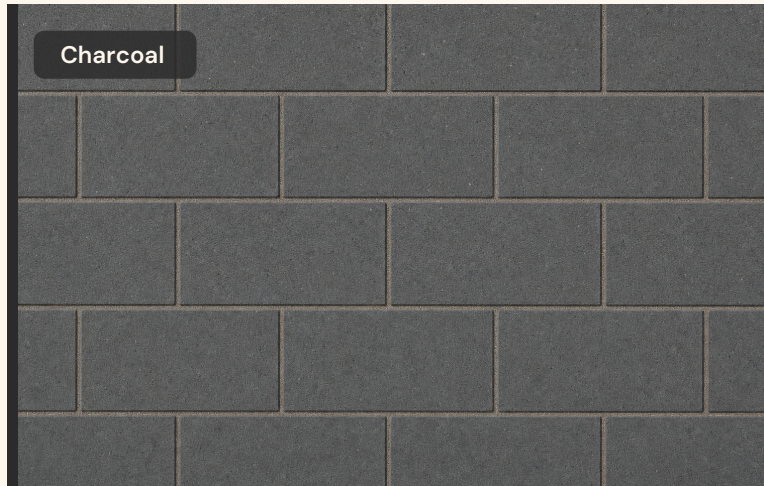

Specifications

Format

300 × 300 mm

Thickness options

40 mm & 60 mm

Pavers per m²

approx. 11.1

Supplied

On pallets

Price on Application

Contact Brickora for current pricing

Colour range




Charcoal



Slate Grey



Sand




Autumn

Brickora Plank

Format 330 × 165 mm · 60 mm

A long, linear plank paver that brings a sleek, modern rhythm to paths, patios and pool surrounds. Its elongated shape draws the eye and adds a sense of movement to any layout.

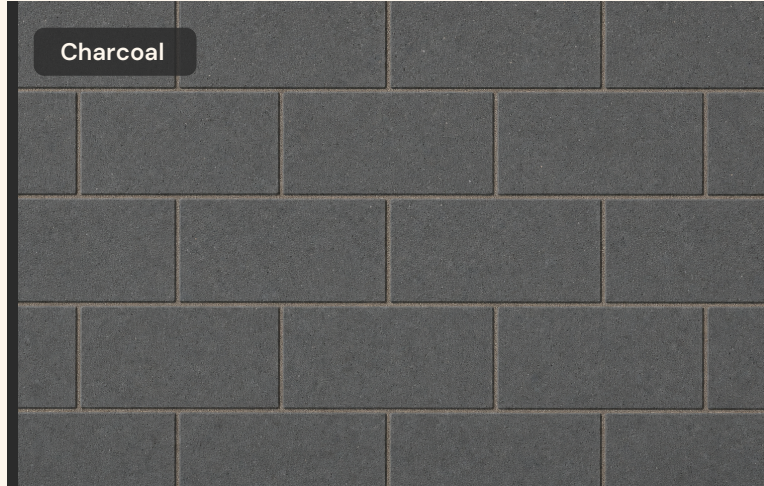

Specifications

Format

330 × 165 mm

Thickness

60 mm

Pavers per m²

approx. 18.2

Supplied

In packs

Price on Application

Contact Brickora for current pricing

Colour range



Charcoal



Ash



Silver

All pavers on this range are shown sealed.

Brickora Plank Speckle

Format 330 × 165 mm · 60 mm

The linear plank format finished with a soft, granite-look speckle. Fine tonal flecks add texture and warmth while keeping the clean, contemporary lines of the plank shape.



Specifications

Format

330 × 165 mm

Thickness

60 mm

Pavers per m²

approx. 18.2

Supplied

In packs


Price on Application

Contact Brickora for current pricing

Colour range



Snow



Mist



Storm



Stone

All pavers on this range are shown sealed.

Brickora Plank Fleck

Format 330 × 165 mm · 60 mm

Our plank paver with a fine terrazzo-style fleck for a polished, high-design finish. Ideal where a modern, architectural feel is called for across entertaining areas and pool surrounds.



Clay

Specifications

Format

330 × 165 mm

Thickness

60 mm

Pavers per m²

approx. 18.2

Supplied

In packs

Price on Application

Contact Brickora for current pricing


Colour range



Clay



Dew



Sky

For this fleck range we recommend a penetrating sealer only. All pavers shown sealed.

Brickora Classic Brick Paver

Format 230 × 114 mm · 60 mm

A traditional brick-shaped paver that suits both heritage and modern settings. Its familiar proportions are perfect for herringbone and stretcher patterns, adding timeless charm to paths and driveways.



Specifications

Format

230 × 114 mm

Thickness

60 mm

Pavers per m²

approx. 37.8

Supplied

In packs


Price on Application

Contact Brickora for current pricing


Colour range



Sand




Red



Autumn



Ash




Charcoal

Brickora Heavy Duty Clay Paver

Format 230 × 114 mm · 60 mm

A robust, fired-clay paver built for demanding areas and lasting colour. The natural clay finish resists fading and wear, making it a strong choice for driveways and high-traffic surfaces.

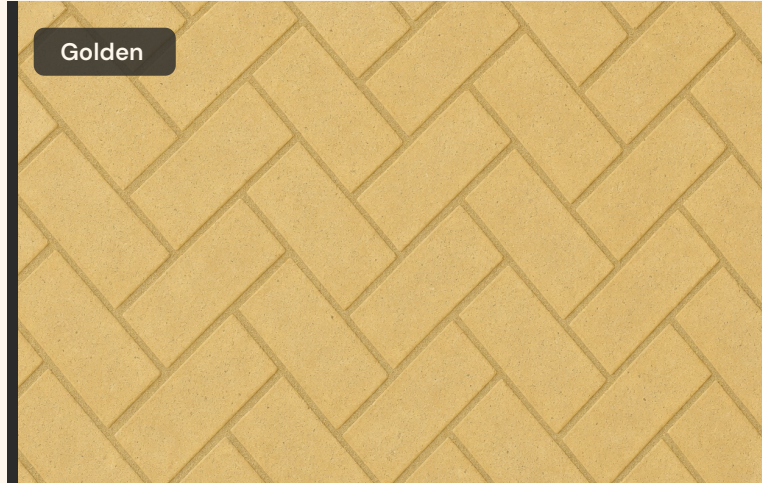

Specifications

Format

230 × 114 mm

Thickness

60 mm

Pavers per m²

approx. 37


Supplied

In packs


Price on Application

Contact Brickora for current pricing

Colour range



Golden



Red

Golden and Red are made to order and subject to availability. Please contact Brickora to confirm.

Bullnose Edging

Rounded-edge pavers for steps and pool surrounds

Bullnose pavers give a smooth, rounded finish to step treads, pool copings and any exposed paved edge. Because they are machined, please order all you need for a project at once so colour, texture and profile stay consistent.

Square Bullnose 200 mm

Price on Application

200 × 200 mm face · 50 mm & 60 mm profiles

Colours: Charcoal · Sand · Ash · Slate Grey · Silver

Grand Bullnose 300 mm

Price on Application

300 × 300 mm face · 40 mm & 60 mm profiles

Colours: Autumn · Charcoal · Sand · Slate Grey

Sealing & Accessories

Sealing protects your investment and keeps pavers looking their best, especially in coastal or harsh conditions. A quality sealer helps repel stains and makes cleaning easier. Brickora offers a range of sealers and paving accessories to finish and maintain your project.

Gloss Sealer

Clear gloss finish with deep, wet-look colour enhancement. Tough, durable and stain resistant for drives, paths and alfresco areas.

Satin Sealer

Clear satin wet-look finish that enriches colour while resisting oil, grease and everyday dirt.

Penetrating Sealer

An invisible, natural finish that lets the surface breathe and does not add slipperiness — ideal for fleck ranges and pool surrounds.

Water-Based Sealer

Satin-to-gloss, UV-stable, highly water-repellent coating for paths and pedestrian areas (not for vehicle traffic).

Stain Repel

Low-sheen, breathable finish with superior stain resistance and a near-natural appearance.

Jointing Sand & Cleaners

Whitewashed jointing sand, joint-setting compound, heavy-duty cleaner and efflorescence remover to prepare and maintain your paving.

Application tip: apply to a dry surface, using two coats for a good stain and water-repellent seal. Around 1 litre covers 3–5 m² depending on porosity. Allow 2–4 hours between coats and 6–8 hours before light foot traffic.

Important Information

Ordering & colour consistency

We recommend all product be delivered together, as colour can vary within and between production batches. Blend from several packs as you lay for the most even result.

Product inspection

Please inspect and supervise all pavers before and during installation. Any concerns should be raised with the place of purchase before laying.

Sizing

Product is supplied within the dimensional tolerances of AS/NZS 4455. Sizes and quantities per square metre are nominal and may vary with technique, colour and manufacturing.

Colour variation & fastness

Displayed products are examples only; natural variation occurs within and between runs. All pavers fade gradually in sunlight — sealing helps maintain the chosen colour.

Cutting & cleaning

Fully wet pavers before cutting to prevent slurry staining, and wash off any slurry before laying. Do not use acid-based products to clean masonry pavers.

Installation & control joints

Allow 2–3 mm joints for jointing sand, and use a base course under any pavement carrying vehicles. Add control joints in large restrained areas as described in the laying guide.

Bedding & jointing sand

Use clean, well-graded washed sand for bedding, and a finer, clean, salt-free washed white sand for joints. Avoid fatty sands, loams or packing sands.

Efflorescence

A temporary white deposit may appear as salts migrate to the surface. This clears naturally as the pavers settle into their environment.

Pool surrounds

Protect paving from salt water with a suitable sealer to at least 2 m from the pool edge, and reseal periodically. Seal both faces of bullnose pavers before installation.

Transport & handling

Products are supplied in packs or on pallets. Load-restraint rules apply to loose product, and trailer weight limits may apply — please check with our team before pickup.

For further information, please contact a Brickora sales advisor — see the back cover for details.



BRICKORA

CRAFTED FOR BUILDERS

Quality pavers & building materials — imported and supplied in Western Australia.

Get in touch

ADDRESS	23 Victoria Road, Kenwick WA
PHONE	+61 449 989 159 · +61 466 589 094
SALES	sales@brickora.com.au
ENQUIRIES	info@brickora.com.au
TRADE	info@globalaustralia.com.au



Scan to connect
with Brickora

Prices available on application and subject to change. Colours shown are indicative only; actual product may vary.

© 2026 Brickora. Product images are illustrative. Edition 2026.